


HCV5

HCV5 is an advanced GPS tracker for trucks, busses, agriculture, and other specialized machinery. It is designed for vehicle tracking and can perform advanced tasks – read on-board computer data (CAN), monitor driver behavior, remotely download tachograph data, manage fuel, etc.

The device is available in variations that use GSM (2G), UMTS (3G) and LTE Cat M1 (4G) networks and Bluetooth for communication.

Applications

- Real-time monitoring of fleets and cargo
- Remote tachograph solution
- Fleet efficiency optimization
- Driver behavior monitoring
- Driver, vehicle and cargo safety and security
- Fuel monitoring
- Cargo conditions monitoring
- Trailer tracking
- Customizable with accessories
- Accident reconstruction data recording

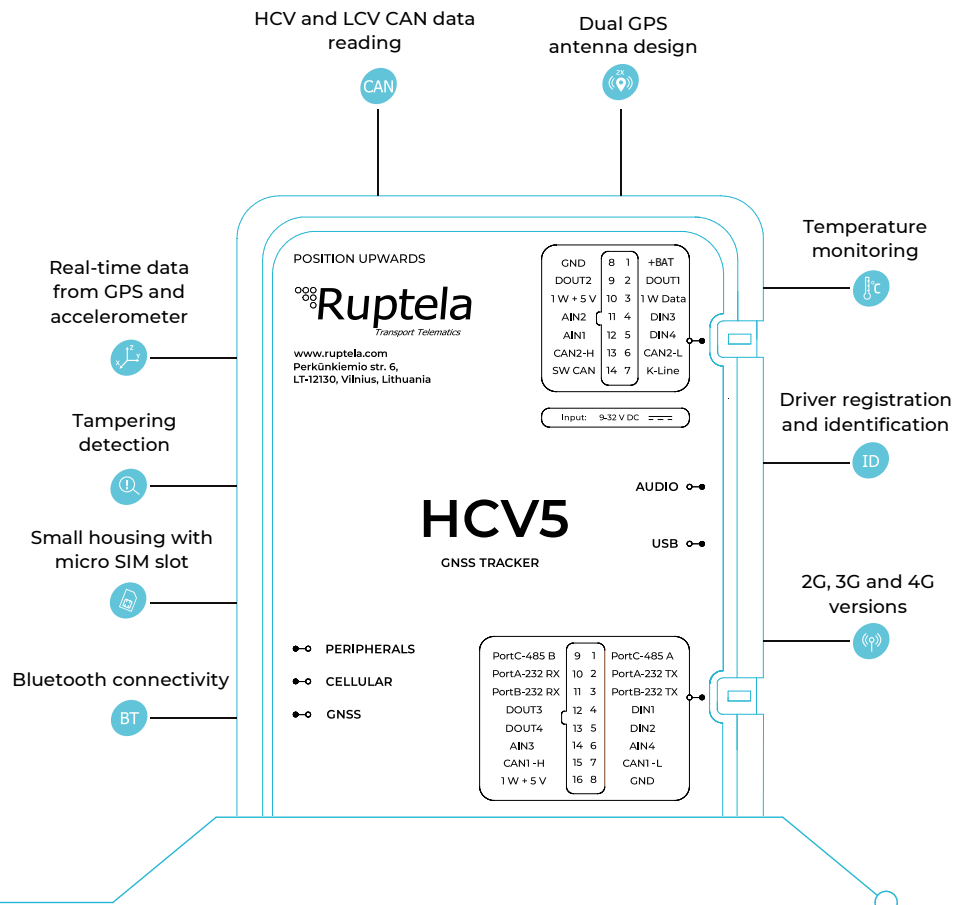

Detailed specifications

Environmental specifications

Temperature	Operating:	-20 to +60 °C
	Storage:	-20 to +45 °C
	Battery charging:	0 to +45 °C
	Battery discharging:	-20 to +60 °C
Relative humidity	5% to 95% Non-condensing	

Electrical specifications

Power supply range	9 – 32 V DC
Internal battery	LiPo 3.7 V 1050 mAh
Protections	Battery and a 1-Wire power line short circuit protection Reverse polarity protection Electrostatic discharge protection on USB, SIM card slot and 1-Wire data line Overcurrent protection on a 1-Wire power line and digital outputs Overvoltage protection on analog inputs Charging protection

Average power consumption @ 12 V DC

Operating (battery fully charged)	Normal operation (data sending interval ~15 s):	~160 mA
	Normal operation (constant link enabled):	~155 mA
	Peak value:	~260 mA
Sleep mode	All modules disabled:	~6 mA
	Modem in sleep mode, other modules disabled:	~8 mA
	Modem enabled, other modules disabled:	~9 mA
	GNSS module enabled, other modules disabled:	~22mA

Connectivity

2G option	Modem: Quectel M95 Antenna: Internal Frequency bands @ 2G (GSM): 850/900/1800/1900 MHz
3G option	Modem: Quectel UG96 Antenna: Internal Frequency bands @ 2G (GSM): 850/900/1800/1900 MHz Frequency band @ 3G (UMTS): 800/850/900/1900/2100 MHz
LTE Cat M1 option	Modem: Quectel BG96 Antenna: Internal Frequency bands @ 2G (GSM): 850/900/1800/1900 MHz Bands @ 4G (LTE Cat M1): B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B28/B39 Bands @ NB-IoT (in development): B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B28
GNSS module	Module: U-blox EVA-M8M Antenna: Internal and external (available as an additional accessory) Positioning systems: GPS, GLONASS, Galileo Augmentation systems: QZSS, SBAS (WAAS, GAGAN, EGNOS, MSAS) Aided start services: AssistNow Online (A-GPS) Tracking sensitivity: -154 to -164 dBm Reacquisition sensitivity: -152 to -160 dBm Cold start duration: < 30 s Aided start: As low as 3 s
Bluetooth module	Module: NRF52832 Bluetooth version: 5.1 Low energy

Detailed specifications

Interfaces

4 x Digital inputs	Voltage range: 0 - 30 V DC Voltage threshold: 4 V DC Voltage threshold when inverted: 250 mV DC
4 x Analog inputs	Voltage range: 0 - 30 V DC Resolution: 12 bit
4 x Digital outputs	Maximum voltage: 32 V DC Maximum current: 1 A @ 25 °C
3 x CAN interfaces	High speed CAN interfaces: 2 Single-Wire CAN interfaces: 1 FMS, J1939, HCV CAN, LCV CAN, OBD (including proprietary manufacturer data) and tachograph data reading 2 interfaces can be used simultaneously (2 x High speed or 1 x High speed + Single-Wire)
K-Line interface	OBD parameter and DTC reading Tachograph data reading
3 x Serial ports	RS232 ports: 2 (DFS, refrigerators, transparent channel, RFID) RS485 ports: 1 (DFS, transparent channel, J1708 data reading)
1-Wire interface	Power output: 100 mA @ 4.7 V DC iButton DS1990A, DS1971, up to 4 DS18B20 temperature sensors
User interfaces	Micro USB interface 3 x Indication LEDs 3.5 mm audio interface (not available for the LTE Cat M1 option)

Features

Internal storage	8 MB
External storage	Up to 32 GB
Accelerometer	Built-in 3-axis (auto-calibrating, impact detection, motion sensing, tilt detection, g-force up to 4 g)

Certifications and ratings

Certifications	E-mark, CE, FCC, IC, RoHS, WEEE, EAC (in progress)
-----------------------	--

Physical properties

Dimensions	101 x 74 x 23 mm
Weight	128 ± 1 g
Housing	Plastic

Ordering information

HCV5-2G-GL-BT	HCV5 with global 2G and Bluetooth
HCV5-3G-GL-BT	HCV5 with global 3G and Bluetooth
HCV5-LTM-GL-BT	HCV5 with global LTE Cat M1 and Bluetooth

Contact information:

Perkūnkiemio g. 6
LT-12130 Vilnius, Lithuania
Phone: +370 520 451 88
Web: www.ruptela.com

Datasheet v1.3
2020-09-21